



## TECHNICAL SPECIFICATION SHEET

Updated: March 2017

### PRODUCT

---

## PMC PREMIUM GLOSS BLOCKOUT PBK65F WG62

### CATEGORY

---

Utility

### MANUFACTURER

---

PMC Label Materials Co., Ltd.

### WEBSITE

---

[www.pmclabel.com](http://www.pmclabel.com)

### COUNTRY OF MANUFACTURE

---

Thailand

### APPLICATIONS

---

Designed for wide range of labels and stickers, with a glossy finish, for general purpose application. It is advisable to test the product with the end-use conditions during the qualification to ensure it meets specific requirements.


### PRODUCT COMPONENTS

---

- |  |  |
|--|--|
| <b>Facestock (Premium Gloss Blockout):</b> | Super white with glossy surface, one side cast coated, and mirror finished printing paper.   |
| <b>Adhesive (PBK65F):</b>                  | A general purpose grey colour, permanent adhesive, with very good water and aging resistance. Featuring excellent adhesion to low surface energy substrates. |
| <b>Liner (WG62):</b>                       | Super calendered White Glassine paper  |

**Please note:** B&F Papers has endeavoured to ensure this information is correct; however, we do not accept liability for any error or omission. We reserve the right to update this information without prior notice.

*B&F Papers are committed to being an environmentally responsible company. [www.bfpapers.co.nz](http://www.bfpapers.co.nz)*

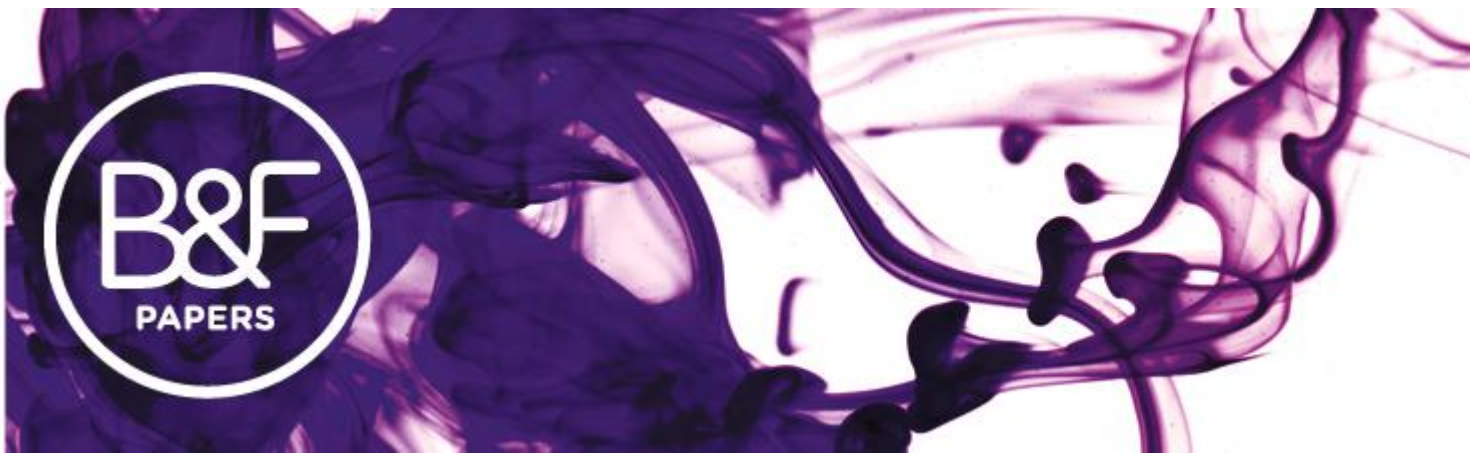

## TECHNICAL SPECIFICATIONS

---

	<b>Grammage</b>	<b>Thickness</b>
Facestock	80gsm	82 micron (3.2mil)
Liner	60gsm	54 micron (2.1 mil)
Total	159 gsm , ±10%	153 micron , ±10%

## ADHESIVE PHYSICAL PROPERTIES

---

Initial Tack	Glass	FTM 9	≥ 12.5	N/25 mm.
Initial Tack	Stainless Steel	FTM 9	≥ 12.0	N/25 mm.
Adhesion to	Stainless Steel	FTM 2 20 minute 90° peel	≥ 6.5	N/25 mm.

Minimum Service Temperature	-40 °C	-40 °F
Maximum Service Temperature	120 °C	248 °F
Minimum Application Temperature	-5 °C	23 °F

Shelf Life: 1 year if stored in 22°C and 50% RH condition. The product must be stored in a shady or cool place and not directly exposed to sunlight. These characteristics are average values supplied for guidance purposes

**Note:** It is recommended that all pressure sensitive materials are trialled prior to printing.

**Please note:** B&F Papers has endeavoured to ensure this information is correct; however, we do not accept liability for any error or omission. We reserve the right to update this information without prior notice.

*B&F Papers are committed to being an environmentally responsible company. [www.bfpapers.co.nz](http://www.bfpapers.co.nz)*